

Built-In Wall Oven Flush Inset Installation Instructions

Please use this information along with the normal installation instructions to achieve the flush inset installation of your appliance.

ADDITIONAL MATERIALS YOU WILL NEED

• Clean Release Masking Tape – 2" width (min)

PREPARATION

- Measure your cabinet to ensure all dimensions match the specific flush inset requirements for your model (see chart).
- 2. Apply Clean Release Masking Tape to all cabinet faces for protection while installing the unit. For each edge of the cabinet opening, start tape 1/2" in from cabinet face and wrap around front face to protect edges. Ensure tape extends around the entire opening - top, bottom, and both sides.

INSTALLATION


- 1. Follow main instructions for product installation.
- 2. Remove Clean Release Masking Tape before driving the mounting screws and trapping it in place.
- 3. Complete remaining steps of installation.





1. Bottom trim flush installation

2. Extruded aluminum trim flush installation

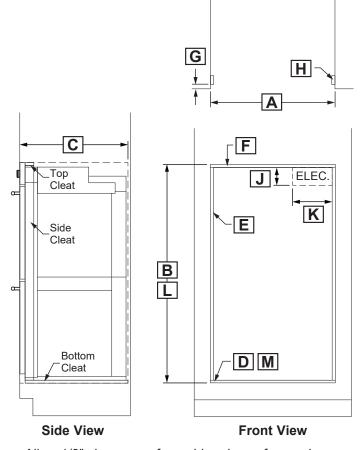

Top View

Allow 1/8" clearances from side edges of oven door.

			30"			
			Single Wall Oven		Double Wall Oven	
1. Bottom trim flush installation			ZTS90DS ZTSX1DS	ZTS90DP ZTSX1DP	ZTD90DS ZTDX1DS	
Cutout	Α	Minimum cutout width with 1/8" side reveals	30	30	30	30
	В	Minimum cutout height with 1/8" top reveal, 1/4" bottom reveal	29-1/16	29-1/16	51-9/16	51-9/16
	С	Minimum cutout depth	24-15/16	24-15/16	24-15/16	24-15/16
Cleats	D	Bottom cleat thickness – extends full depth of cabinet	11/16	11/16	11/16	11/16
	E	Side cleat thickness	3/4	3/4	3/4	3/4
	F	Top cleat thickness	1-1/8	1-1/8	5/8	5/8
	G	Setback – all cleats	1-3/8	1-7/16	1-3/8	1-7/16
	Н	Depth - side and top cleats	2-1/2	2-1/2	2-1/2	2-1/2
Electrical	J	Vertical from upper right corner	5-1/4	5-1/4	5-1/4	5-1/4
Junction Box	K	Horizontal from upper right corner	9-1/2	9-1/2	9-1/2	9-1/2
2. Extruded aluminum trim flush installation			ZTSX1DS ZX30VT1	ZTSX1DP ZX30VT1	ZTDX1DS ZX30VT2	ZTDX1DP ZX30VT2
Cutout	L	Minimum cutout height with 1/8" top reveal, 1/8" bottom reveal	28-5/8	28-5/8	51-1/8	51-1/8
Cleats	М	Bottom cleat thickness – extends full depth of cabinet	1/4	1/4	1/4	1/4

All dimensions shown are in inches.

*Accessory Trim Kits sold as aftermarket only on 90 Series Ovens, included in X Series Ovens